

TITAN LED HIGH BAY, 150 W

Round LED high bay · 90 / 120 / 150 W selectable · 5000 K · 0–10 V dimming

PRODUCT OVERVIEW

A round 150 W LED high bay for shops and warehouses: up to 22,500 lumens of 5000 K daylight-white light from a sealed die-cast body. Set 90, 120 or 150 W on the light to suit the mounting height, and dim it with a 0–10 V dimmer.

22,500 lm	3	5000 K	5 years
at 150 W (150 lm/W)	power settings: 90 / 120 / 150 W	daylight white, 90° beam	warranty

KEY FEATURES

Bright and even

LEDs behind a polycarbonate lens spread a 90° beam across the floor.

Runs cool

Die-cast aluminum fins carry the heat away from the LEDs and the driver.

Sealed

IP65 keeps dust and water spray out; IK08 impact rating.

Listed

ETL / cETL to UL 1598 and CSA C22.2 No. 250.0; DLC Premium.

Three power settings

Set 90, 120 or 150 W on the light to suit the mounting height.

Hook and safety rope

Every light comes with a G-hook and a safety rope; a U-bracket is optional.

IDEAL APPLICATIONS

- Fabrication shops and slab yards.
- Warehouses and distribution centers.
- Garages, workshops and barns.
- Gyms and other high-ceiling rooms.

PLAN THE LIGHTING

Count the lights for the floor area and mounting height, plan the circuits and dimmers, and choose the hook or a U-bracket for each light.

DETAILS AND SPECIFICATIONS

Titan LED High Bay, 150 W · technical data



Driver, hook and cord



G-hook and safety rope (included)



U-bracket (option)

LIGHT

Power	150 W, selectable 90 / 120 / 150 W
Light output	22,500 / 18,000 / 13,500 lm (±10 %), 150 lm/W
Color	5000 K, CRI ≥ 70
Beam	90°
LED life	L70B10 over 100,000 h (factory data)

ELECTRICAL

Input	100–277 V AC, 50/60 Hz
Power factor	≥ 0.9
Dimming	0–10 V
Cord	3 ft (0.9 m), no plug: hard-wired by an electrician

BODY


Size	Ø 10 7/8 × 6 3/8 in (Ø 275 × 161 mm)
Weight	4.9 lb (2.2 kg)
Housing	Die-cast aluminum heat sink, black
Lens	Polycarbonate
Protection	IP65, IK08

MOUNTING

Included	Hook (G-hook) and safety rope
Options	U-bracket, extra hooks and safety ropes, emergency driver
Mounting height	4 to 12 m (13 to 39 ft), factory recommendation

LISTINGS AND WARRANTY

Safety	ETL / cETL listed: UL 1598, CSA C22.2 No. 250.0 (product label)
DLC	DLC Premium (factory listing)
Warranty	5 years (factory warranty policy)

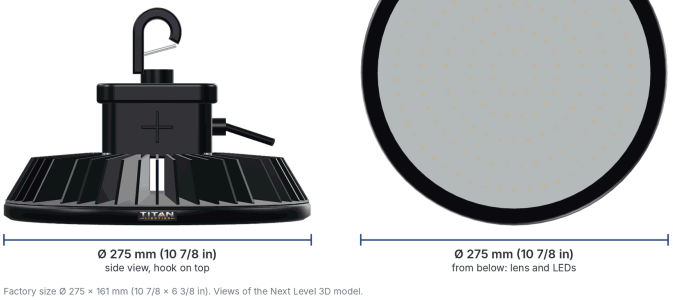

Factory size Ø 275 × 161 mm (10 7/8 × 6 3/8 in). Views of the Next Level 3D model.

INCLUDED

- Titan 150 W LED high bay.
- Hook (G-hook) and safety rope.
- 3 ft (0.9 m) cord, no plug.
- Installation and wiring manual.

OPTIONS

- U-bracket.
- Extra hooks and safety ropes.
- Emergency driver.

Questions, or ready for a written quotation? **+1 941-900-3018** · **sales@nextlevel.plus** · **nextlevel.plus**

Install: Hard-wired by a licensed electrician to local codes. Factory data, 2026 (quotation, specification sheet and product label). Lumens are nominal (±10 %). Listings are the manufacturer's. Photographs: the factory's product images. Specifications are subject to change without notice.