
MATERIAL HANDLING & STORAGE

TECHNICAL SPECIFICATION SHEET

10′ HEAVY-DUTY SLAB RACK

Galvanized ground-rail rack · 16 posts · wood inserts · 66,000 lb

Two hot-dip galvanized ground rails and 16 removable square posts make a storage lane for full slabs and bundles.

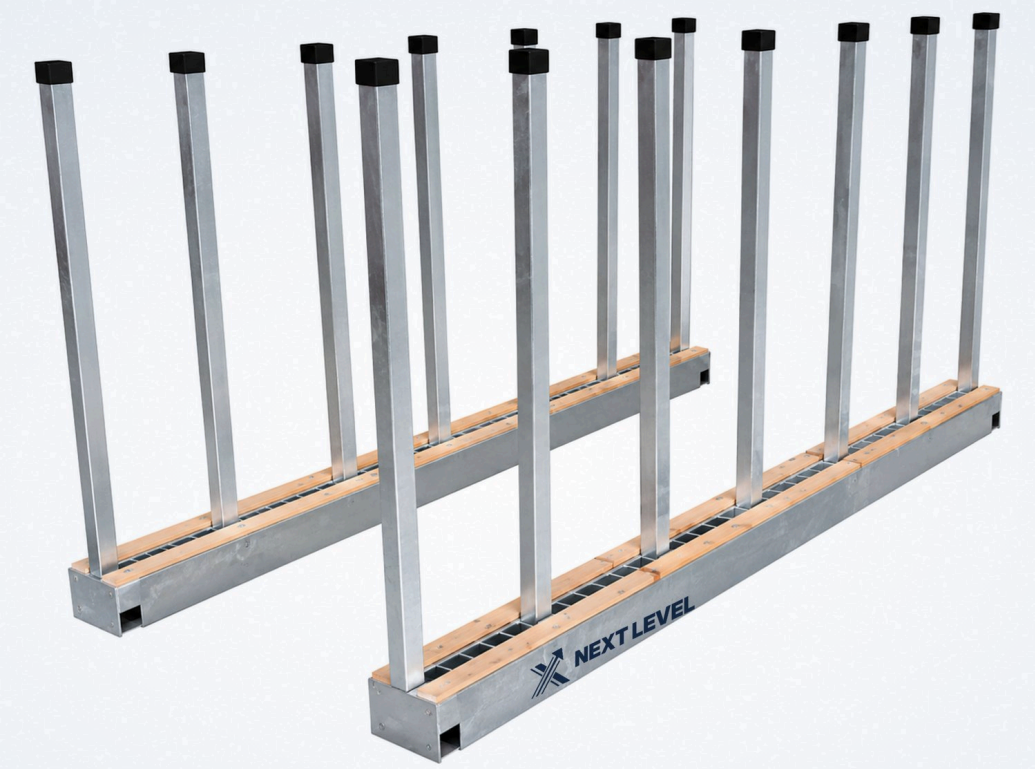

66,000 lb	11,000 lb	16	10 ft
Total rating (30 t)	Per slot (5 t)	Removable posts	Galvanized rails

KEY FEATURES

- **Wood under every slab**
  Wood boards run along the top of each rail, either side of the posts, so slab edges sit on wood.
- **Hot-dip galvanized**
  Rails and posts are galvanized for the yard, wash bays and wet shops.
- **Crane, lifter or forklift**
  Load from the aisle with an overhead crane, a vacuum lifter or a forklift.
- **Removable posts**
  The posts lift out of the rail sockets: space them for single slabs or for whole bundles.
- **Build a slab yard**
  Set the rail spacing for your slab length and add racks in rows with lifting aisles between them.
- **Two racks, one system**
  For lighter stock, the 44,000 lb slab rack uses the same 10 ft footprint with rubber strips.

APPLICATIONS Full slabs in the warehouse or yard, loaded by crane, vacuum lifter or forklift; bundles kept together by job, material or supplier; rows of racks for a planned slab yard; outdoor and wet areas.

10′ HEAVY-DUTY SLAB RACK · TECHNICAL DATA

RACK	
Configuration	2 ground rails, 16 square posts (8 per rail)
Rail length × width	117 × 8.7 in (2,970 × 222 mm)
Rail height	5.5 in (140 mm)
Post height from the floor	59.1 in (1,500 mm)
Posts	Removable, rubber caps
Slab contact	Wood boards on top of each rail, along both edges

RATING (FACTORY)	
Per slot	11,000 lb (5 t)
Total	66,000 lb (30 t)

CONSTRUCTION	
Material	Steel, hot-dip galvanized
Weight	970 lb (440 kg) per set
Packing	118.1 × 17.7 × 11.8 in (3,000 × 450 × 300 mm)

INCLUDED AS STANDARD

- 2 galvanized ground rails
- 16 removable posts with rubber caps
- Wood boards fitted on both rails
- Shipped on a pallet

DETAILS





Wood boards on both rail edges · Rail end, posts and wood boards

Factory data, 2026 (proforma invoice, drawings, data sheets and quotations). Capacities are the factory's ratings for the product itself; your floor, lifting equipment and loading method must suit the load. U.S. values first, metric in brackets; added conversions are approximate. Specifications are subject to change without notice. Images may show optional equipment. Document date: Nov 2026. Next Level Enterprises · www.nextlevel.plus · +1 941-900-3018 · sales@nextlevel.plus